

Fuelling products

Line mounted deadman valves

F388(4-inch), F389(3-inch), F392(6-inch)



F388

Key Features

- Working pressure - 200 psi
- Reference pressure - 50 psi min. air or fuel
- Closing time - adjustable from 0.8 to 15 sec. (factory set at 2.5 sec.)
- Opening time - 10 seconds (approximately)
- Peak surge pressure - 275 psi
- Special notes: for proper operation inlet piping - must be straight for 15-inches and of same I. D. as valve.

Description

Weight or change (pounds)

F389 3-inch aluminum valve with ASA 150 pound flanges	13.5
F388 4-inch aluminum valve with ASA 150 pound flanges	27.0
F392 6-inch aluminum valve with ASA 150 pound flanges	66.8

These Meggitt valves can be used as shutoff valves in any fuel system. The application of either air or fuel pressure to the valve will allow the units to open. Removal of this pressure causes the system pressure to close the valve. This makes them suitable for “deadman” operation.

Ordering data:

When ordering, select the modifications desired from the modification section and specify the complete part number including appropriate modification letters.

Meggitt Control Systems

Our product competencies & services:

Aerospace valves | Thermal management solutions | Environmental control systems | Electro-mechanical products
Ground fuelling products | Energy products | Aftermarket services

MEGGITT
smart engineering for
extreme environments


Fuelling products

Line mounted deadman valves

F388(4-inch), F389(3-inch), F392(6-inch)

Key Dimensions

Schematic of System Using F388, F389 or F392

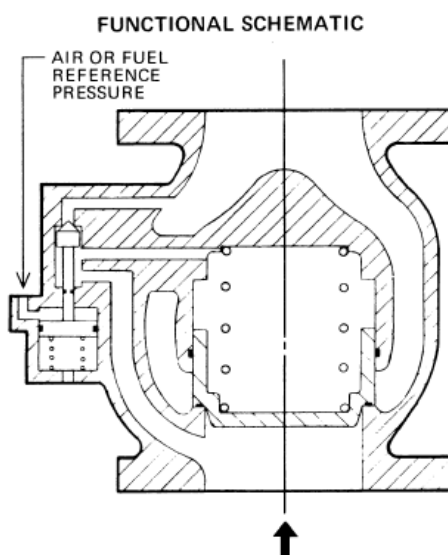

Contact

Meggitt North Hollywood

12838 Saticoy Street
North Hollywood
California 91605-3505
USA

Tel: (818) 765-8160

Fax: (818) 759-2194

www.meggitt.com

Meggitt Control Systems

Our product competencies & services:
Aerospace valves | Thermal management solutions | Environmental control systems | Electro-mechanical products
Ground fuelling products | Energy products | Aftermarket services

MEGGITT
smart engineering for
extreme environments