

## HOSE END CONTROL VALVES

### F595 SUPERCEDES THE F574 AND F594



The F595 HECV has been designed to improve the pressure control function at high flow rates. Tests have shown that a flatter pressure control curve at flow rates up to 600 USGPM (2270)\* will result from using this new HECV. What does this mean? Aircraft refuelling times may be incrementally reduced when the F595 is used. Some further good news the F595 utilizes most of the same parts as were used in the F594. The F595 utilizes a mechanical lockout device vs. the F594. The F595 is available with four different spring settings to cover all needs.

The F595 is directly interchangeable with the F594, however, as indicated above, utilizes a mechanical lockout device thus eliminating the need to use a hydraulic type lockout device in order to check other control components within the system. The F595 can also directly replace the older F574 hose end control.

Existing F574 HECV's can be modified to provide flow characteristics of the F594 with a kit designed for this purpose. The kit part number is KITF594-101. Ask your local distributor for pricing information. The F594 or F595 has a slightly longer body length to accommodate the installation of two units in tandem where desired. The reworking of the F574 with the above kit does not affect the length, hence tandem mounting is not possible.

### Features

- Flattest pressure control curve Available - up to 600 USGPM (2270 LPM) and stable to 800 USGPM (3030 LPM)\*
- Compact, lightweight design
- Can be mounted in tandem for use as primary and secondary
- Available with springs for 35 (2.4 BAR), 45 (3.1 BAR), 50 (3.4 BAR) and 55 (3.8 BAR) psi nominal control
- Available with end fittings to mate J.C. Carter nozzle
- Controls surge pressure to 120 (8.3 BAR) psi and lock-up pressure to 70 (4.8 BAR) psi

See the modification section of this catalog for various options to the part number listed above.


Contact your local Whittaker distributor or Whittaker directly for technical information beyond that listed in the technical section of this catalog.

**MEGGITT**

# HOSE END CONTROL VALVES

## F595 SERIES

### Hose End Control Valve Performance 45 PSI Nominal w/100 PSI Inlet

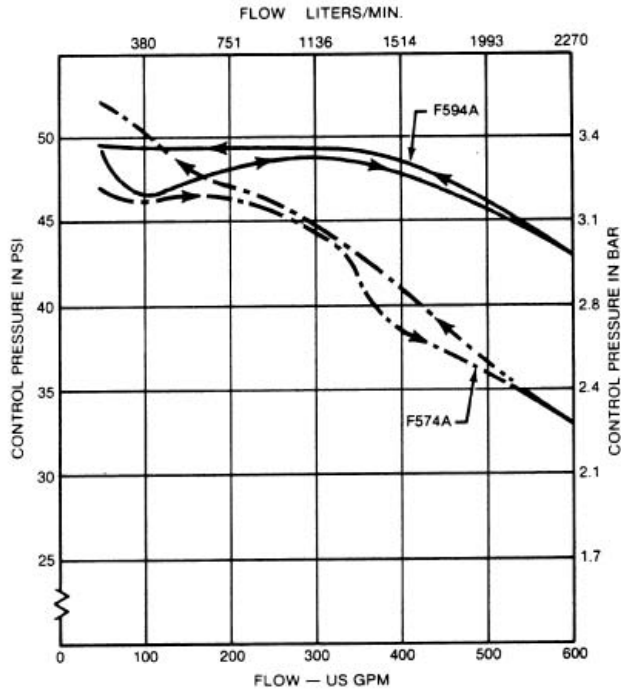

### Illustrated Parts Breakdown

Symbol	Part Number	Description
1		Body
2	RR275 S	Spirolox
3	2671765-146	Lip-seal
4	BD2661058BD147	Packing
5	2783013-101	Poppet
6	NK500A8-8M	Screw
7	2763595-101	Retainer
8	7-229-N675-7	Packing
9	S12560-126	Channel Seal
10	2661058BD127	Packing
11	2671892-2	Screen
12	2661058BD007	Packing
13	MS19060-20	Ball
14	2671762	Spring
	2763651-101	Spring (BMod)
	2701514	Spring (K Mod)
	2775267-101	Spring (N Mod)
15	2671764	Spring
16	MS16998-42	Screw Socket, Hex Head
17	AN935C416L	Lockwasher
18	2661058A042	Packing
19	N5000-37	Ring, Ret

Avery-Hardoll  
Holland Way  
Blandford Forum  
Dorset DT11 7BJ  
UK

Whittaker Controls  
12838 Saticoy St  
North Hollywood  
California 91605-3505  
USA

Tel: +44 (0) 1258 486600  
Fax: +44 (0) 1258 486601

Telephone: +1 818 765 8160  
FAX: + 1818 759 2194

www.meggittfuelling.com

www.wkr.com  
www.meggitt.com

**MEGGITT**