

HU4000M2 series hose end pressure refuelling coupling



Proven Design Features Retained

Safety in refuelling is of paramount importance. Avery Hardoll's unique internal safety interlock utilises the poppet as an integral part of the interlock system and is therefore not reliant on secondary interlock components. The coupling is unaffected by wear in the aircraft unit slots and tolerates a high level of wear to the lugs. In addition the design of the HU4000M2 does not cause excessive wear to the aircraft unit.

The design includes a wider range of hose adaptor designs, relocation of the swivels, three handle types, and new operating lever design.

Spares and service requirements are also important in this change of design. Ease of maintenance and spares compatibility with its predecessor has been retained.


- Unique internal safety interlock integral to the poppet
- Six slot engagement for easier coupling location
- Independent swivel improves ease of coupling
- Improved choice of operation with three handle options
- Improved nose seal design
- Well proven Mk 6 pressure controller
- Suitable for all current aircraft types
- Robust, lightweight construction

HUMY4000M2 series hose unit - coding chart


NOTE :-

- CODES P, X AND Y ARE NOT APPLICABLE WHEN SURGE CONTROLLER/ADAPTOR CODE ENDS IN 0, 1 IE CODE 30 IS SELECTED.
- CODE P IS NOT REQUIRED IF RING HANDLES (CODE R) IS FITTED.
- CODE P IS NOT APPLICABLE IF SURGE CONTROLLER/ADAPTOR CODE STARTS WITH A 0, 1 IE CODE 03 IS SELECTED (NO SURGE CONTROLLER FITTED).
- CODE X OR Y IS NOT APPLICABLE IF SURGE CONTROLLER/ADAPTOR CODE ENDS WITH A 0 OR 3, 1 IE CODE 40 OR 50 IS SELECTED (NO ADAPTOR FITTED OR A - H 90° ELBOW ADAPTOR FITTED).
- SURGE CONTROLLER/ADAPTOR CODES ENDING IN 5, 6 OR 7 (IE CODE 35) ARE NOT STANDARD, HAVE NOT BEEN DRAWN OR CONFIGURED.
- SURGE CONTROLLER/ADAPTOR CODES ENDING IN 5, 6 OR 7 (IE CODE 35) SHOULD BE CONSIDERED AS SPECIAL SURGE CONTROLLERS/ADAPTORS.

NOZZLE STRUCTURE



ANCILLARIES



BASIC NUMBER

DESCRIPTION	PART No.
LEVER OPERATED HOSE UNIT	HUMZ4566

SURGE CONTROLLER/ADAPTOR

CODE	DESCRIPTION	PART No.	DESCRIPTION	PART No.
00	NO SURGE CONTROLLER/NO ADAPTOR			
01	NO SURGE CONTROLLER/A-H STANDARD ADAPTOR	HUMZ4400	30psi MAX. SURGE CONTROLLER/A-H 90° ELBOW ADAPTOR	HUMZ4554
02	NO SURGE CONTROLLER/A-H 45° ELBOW ADAPTOR	HUMZ4402	45psi MAX. SURGE CONTROLLER/A-H 90° ELBOW ADAPTOR	HUMZ4655
03	NO SURGE CONTROLLER/A-H 90° ELBOW ADAPTOR	HUMZ4403	50psi MAX. SURGE CONTROLLER/A-H 90° ELBOW ADAPTOR	HUMZ4556
04	NO SURGE CONTROLLER/LIGHT REFUELLING ADAPTOR	HUMZ4401	30psi MAX. SURGE CONTROLLER/R-L-R STANDARD ADAPTOR	HUMZ4550
05	NO SURGE CONTROLLER/THEM PROFILE ADAPTOR (IND)	(HUMZ4404)	45psi MAX. SURGE CONTROLLER/R-L-R STANDARD ADAPTOR	HUMZ4551
06	NO SURGE CONTROLLER/CARTER PROFILE ADAPTOR (IND)	(HUMZ4405)	50psi MAX. SURGE CONTROLLER/R-L-R STANDARD ADAPTOR	HUMZ4552
07	NO SURGE CONTROLLER/R45 CARTER PROFILE ADAPTOR (IND)	(HUMZ4406)	30psi MAX. SURGE CONTROLLER/R-L-R STANDARD ADAPTOR	HUMZ4553
30	30psi MAX. SURGE CONTROLLER/NO ADAPTOR	HUMZ4500	30psi MAX. SURGE CONTROLLER/THEM PROFILE ADAPTOR (IND)	(HUMZ4500 & HUMZ4404)
40	45psi MAX. SURGE CONTROLLER/NO ADAPTOR	HUMZ4501	45psi MAX. SURGE CONTROLLER/THEM PROFILE ADAPTOR (IND)	(HUMZ4501 & HUMZ4404)
50	50psi MAX. SURGE CONTROLLER/NO ADAPTOR	HUMZ4502	50psi MAX. SURGE CONTROLLER/THEM PROFILE ADAPTOR (IND)	(HUMZ4502 & HUMZ4404)
60	55psi MAX. SURGE CONTROLLER/NO ADAPTOR	HUMZ4503	55psi MAX. SURGE CONTROLLER/THEM PROFILE ADAPTOR (IND)	(HUMZ4503 & HUMZ4404)
21	55psi MAX. DOUBLE SURGE CONTROLLER/A-H STANDARD ADAPTOR	HUMZ4546	30psi MAX. SURGE CONTROLLER/CARTER PROFILE ADAPTOR (IND)	(HUMZ4500 & HUMZ4405)
31	30psi MAX. SURGE CONTROLLER/A-H STANDARD ADAPTOR	HUMZ4504	45psi MAX. SURGE CONTROLLER/CARTER PROFILE ADAPTOR (IND)	(HUMZ4501 & HUMZ4405)
41	45psi MAX. SURGE CONTROLLER/A-H STANDARD ADAPTOR	HUMZ4505	50psi MAX. SURGE CONTROLLER/CARTER PROFILE ADAPTOR (IND)	(HUMZ4502 & HUMZ4405)
51	50psi MAX. SURGE CONTROLLER/A-H STANDARD ADAPTOR	HUMZ4506	30psi MAX. SURGE CONTROLLER/R45 CARTER PROFILE ADAPTOR (IND)	(HUMZ4500 & HUMZ4405)
61	55psi MAX. SURGE CONTROLLER/A-H STANDARD ADAPTOR	HUMZ4507	45psi MAX. SURGE CONTROLLER/R45 CARTER PROFILE ADAPTOR (IND)	(HUMZ4501 & HUMZ4405)
32	30psi MAX. SURGE CONTROLLER/A-H 45° ELBOW ADAPTOR	HUMZ4509	50psi MAX. SURGE CONTROLLER/R45 CARTER PROFILE ADAPTOR (IND)	(HUMZ4502 & HUMZ4405)
42	45psi MAX. SURGE CONTROLLER/A-H 45° ELBOW ADAPTOR	HUMZ4511	30psi MAX. SURGE CONTROLLER/R45 CARTER PROFILE ADAPTOR (IND)	(HUMZ4500 & HUMZ4405)
52	50psi MAX. SURGE CONTROLLER/A-H 45° ELBOW ADAPTOR	HUMZ4512	45psi MAX. SURGE CONTROLLER/R45 CARTER PROFILE ADAPTOR (IND)	(HUMZ4501 & HUMZ4405)
62	55psi MAX. SURGE CONTROLLER/A-H 45° ELBOW ADAPTOR	HUMZ4513	50psi MAX. SURGE CONTROLLER/R45 CARTER PROFILE ADAPTOR (IND)	(HUMZ4502 & HUMZ4405)

HOSE CONNECTORS


CODE	DESCRIPTION	THREAD OPTIONS AND CODES					
		1	2	3	6	7	8
2" BSP	2" BSP	2.5" BSP	3" BSP	2" NPT	2.5" NPT	3" NPT	
A	LIGHT WEIGHT QUICK DISCONNECT	HUMZ4561	HUMZ4562	HUMZ4563	HUMZ4564	HUMZ4565	HUMZ4566
L	QUICK DISCONNECT ISOLATING VALVE LOCKING SCREW TYPE	HUMZ3671	HUMZ3672	HUMZ3673	HUMZ3674	HUMZ3675	HUMZ3676
Q	QUICK DISCONNECT - STANDARD	HUMZ4412	HUMZ4413	HUMZ4414	HUMZ4415	HUMZ4416	HUMZ4417
S	ISWHEL	HUMZ4418	HUMZ4419	HUMZ4420	HUMZ4421	HUMZ4422	HUMZ4423
V	QUICK DISCONNECT ISOLATING VALVE PUSH BUTTON TYPE	HUMZ3667	HUMZ3668	HUMZ3669	HUMZ3670	HUMZ3671	HUMZ3672

NOTE :- INCLUDE THESE COLUMNS ONLY WHEN SURGE CONTROLLER/ADAPTOR CODES ENDS IN 1, 2 OR 3 (IE CODE 31)

ANCILLARIES

ADD LETTERS ONLY IF ANCILLARY OPTIONS ARE REQUIRED (PLACE IN ORDER AS LISTED)

CODE	DESCRIPTION	PART No.	REMARKS
B	BONDING CABLE	HUMZ1386	
D	DUST CAP - STANDARD	HUMZ4362	ALL BUILDS (EXTERNAL & INTERNAL - SELECTIVE AND NON-SELECTIVE)
G	GAMMON JET TEST ADAPTOR AND VENT PORT ADAPTOR	HUMZ4542	FITTED AS ALTERNATIVE TO A PLUG IN THE HOSE UNIT & VENT PORT IN THE SURGE CONTR.
H	VACUUM RELIEF VALVE 10"Hg	HUMZ3635-1	
CR	VACUUM RELIEF VALVE 17"Hg	HUMZ3635-2	
K	VACUUM RELIEF VALVE 22"Hg	HUMZ3635-3	
M	SELECTIVITY, POSITIONS 1, 2 & 3	HUMZ4331	FACTORY SET TO POSITION 1
N	SELECTIVITY, POSITIONS 4 & 5	HUMZ4332	FACTORY SET TO POSITION 4
P	PROTECTION RING	HUPZ2580	NOT REQUIRED IF RING HANDLES ARE FITTED. CANNOT BE USED ON BUILDS WITH NO SURGE CONTROLLER
R	RING HANDLE	HUAZ4367	FITTED IN PLACE OF STANDARD STICK HANDLES
T	STIRRUP HANDLE	HUAZ4368	
CR	NO HANDLES FITTED		
C	STICK HANDLE (FIT AS STANDARD)	HUMZ4363	FITTED AS STANDARD
X	60 MESH STRAINER	HUMZ4422	(SHORT) NO SURGE/CONTR.
W	100 MESH STRAINER	HUMZ4423	(LONG) WITH SURGE/CONTR.
Y	(FITTED AS STANDARD)	HUMZ4421	REF. TYPE 0 OR 3
Z	EXTREME COLD WEATHER SEALS	PHL4010	FLUOROSILICON SEALS REPLACING STANDARD FLUOROCARBON SEALS (FITTED AS KIT-SET)

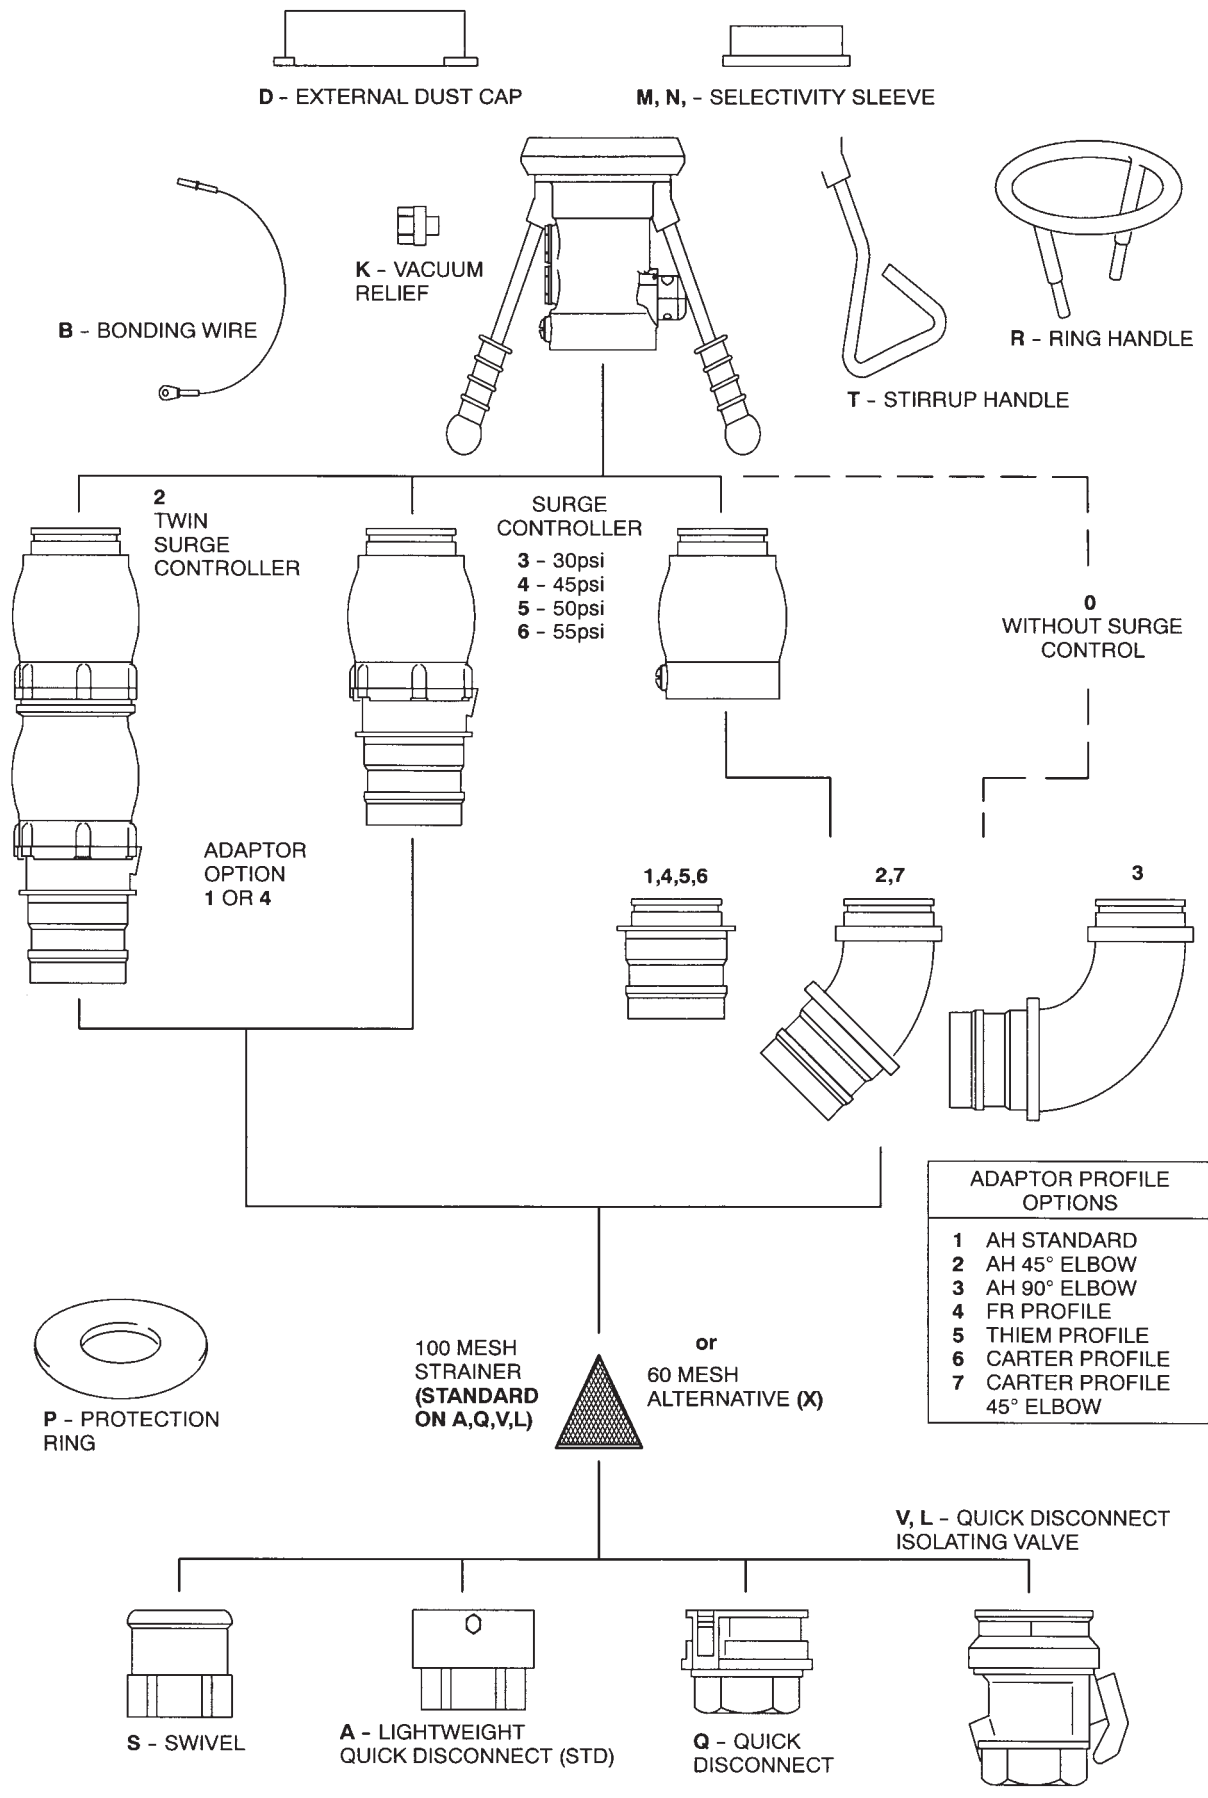

Pressure rating

Max Working Pressure: 10.3 bar (150psi)
 Test Pressure: 15.5 bar (225 psi)
 Max. Flow Rate: 2275 lpm
 500 l gpm
 600 US gpm

Pressure drop (including aircraft adaptor)

Nozzle with Quick-Disconnect and 100 mesh strainer at 1895 lpm 1.03 bar (14.9 psi)

As above plus Surge-Controller 1.79 bar (26.0 psi)

Strength

Although over a kilo lighter than its predecessor the HU4000 retains its basic strength and has been rigorously tested to ensure safe operation under normal operating conditions.

Compatibility

British Standard Aerospace Specification 4C14
 International Standards Organisation ISO R45
 NATO Stanag 3105
 Designed to meet the requirements of MIL-N-5877E

Length

Complete nozzle, surge controller and quick disconnect 370 mm (14.6 in.)

Materials

Those in contact with the fuel are anodised aluminium alloy, stainless steel, PTFE Viton and high nitrile rubber.

Operating temperatures

-20 deg C to 60 deg C (-4 deg F to +140 deg F)

Cold weather conditions



Special seal kits available for temperatures down to -40°C.

Weights

COMPLETE NOZZLE, SURGE CONTROLLER AND LIGHT WEIGHT QUICK DISCONNECT	5.3Kg (11.6lb)
NOZZLE ASSY	2Kg 50g
HOSE CONNECTOR ASSY	640g
SURGE CONTROL/ADAPTOR	1Kg 570g

STICK HANDLE ASSY (1 SET)	680g
DUST CAP ASSY	200g
PROTECTION RING	360g
VACUUM RELIEF VALVE	60g

Typical performance curves

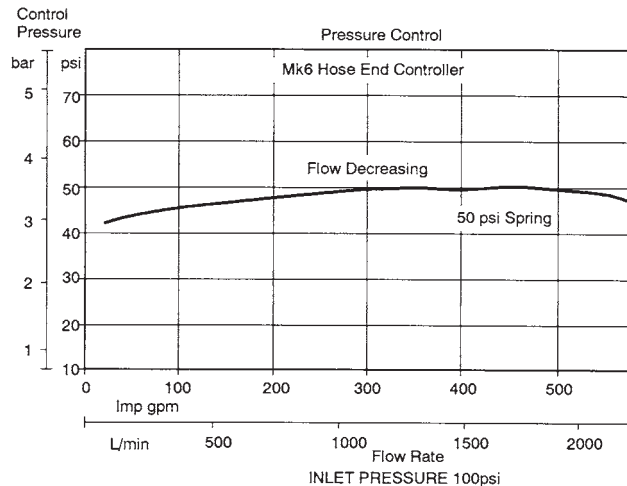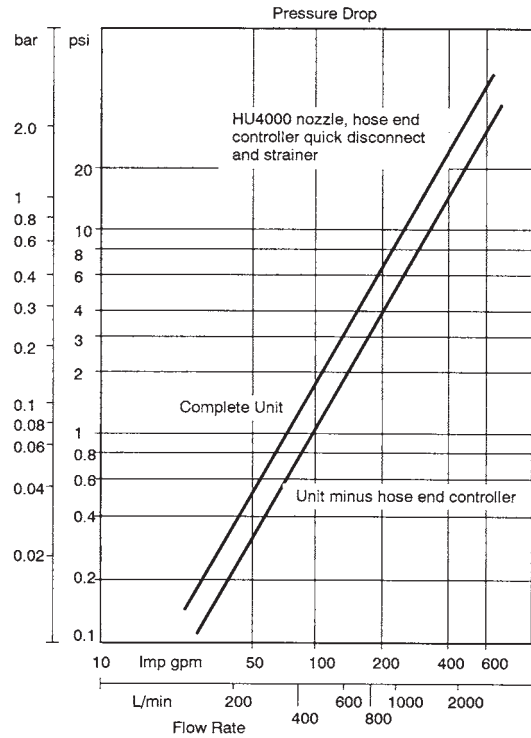

Avery-Hardoll
 Holland Way
 Blandford Forum
 Dorset DT11 7BJ
 UK

Whittaker Controls
 12838 Saticoy St
 North Hollywood
 California 91605-3505
 USA

Tel: +44 (0) 1258 486600
 Fax: +44 (0) 1258 486601

Tel: +1 818 765 8160
 Fax: +1 818 759 2194

www.meggittfuelling.com

www.wkr.com
 www.meggitt.com